



Lynx Portable Display


The Lynx portable LED display is custom-designed by Lynx to meet the demands of every competition level, from small high school meets to World Athletics championships. The display is portable, weather-proof, and integrates seamlessly with FinishLynx technology to display live results at your finish line or field event.

The LED panel measures 100cm x 50cm (19.68" x 39.5") and displays high-visibility text, images, results, and animated graphics for superior fan engagement. Plus, the **5mm** pixel pitch and **4500 nits** of brightness ensure that your live race results are visible in both indoor and outdoor venues.




Software Compatibility

The display receives data through a standard HDMI connection and is compatible with any software capable of sending graphics to an HDMI-connected display. Place it at the finish line or field event and connect it to ResultTV to output results and broadcast-ready graphics, or send live results and images directly from FinishLynx cameras using the Video Display Module (VDM).

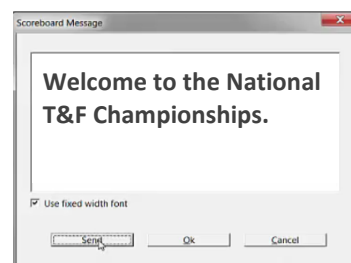

Video Display Module on Lynx Cameras

The portable LED display can connect directly to EtherLynx Vision-series photo-finish cameras running the Video Display Module to display live finish times, results, custom text, and even FinishLynx results images directly from the camera's HDMI output. The VDM option uses custom scoreboard scripts to output live race data and the options can be controlled from inside the FinishLynx software interface. Select capture images, send custom messages, or edit the display layout with a click of the mouse.

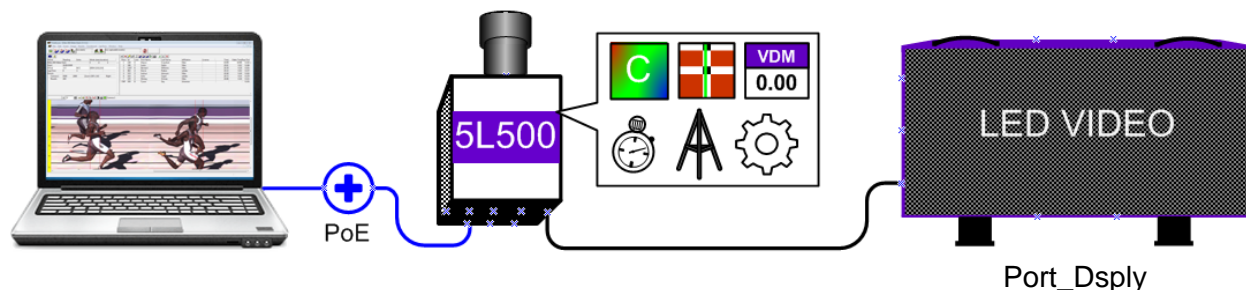

Key Features

- Seamless data integration with FinishLynx/FieldLynx and ResultTV
- Connect directly to a Vision-series camera to display live results using the Video Display Module (VDM) option
- HDMI input is compatible with most graphic display programs
- 5mm pixel-pitch and >5000 nits brightness produces high-visibility graphics suitable for indoor and outdoor events
- IP65 (front) and IP54 (back) weatherproof design protects the LED hardware from harsh weather conditions
- Custom aluminum frame supports the LED panels and provides a polished, professional design
- Scoreboard package includes the mounting feet, carrying case, and all the cables you need



Scoreboard Package Contents (KPort_Dsply)

Part Number	Description
Port_Dsply	High Resolution, 0.5 SQM, LED Video display. Works with 5LVDM, ResulTV, Portable-VDM & HDMI-Extender
FLT-LXLEDFeet	Universal Display Foot Set for Level/Flat Mounting
HDMI-05M-WR	HDMI Cable 5M – Water-Resistant Connector
HDMI-050	HDMI Cable 50 feet
Port_Dsply_CS	Travel/shipping case for Lynx Portable Display
USBCBL-A2B-06	USB A to B Cable, 6' long
USPwr25-WR/ EuroPwr25-WR	25' Power Cord – Water-Resistant Connector

Hardware Specifications

LED Panel Dimensions	100 cm x 50 cm
LED Matrix	104 x 208 pixels
Full Unit Dimensions	100 cm x 52 cm x 17.53 cm (39.5" x 20.5" x 6.9")
Full Unit Weight	27.9 kg (61.4 lbs)
Pixel Pitch	4.81 mm
Refresh Rate	>2000 Hz
Brightness	Up to 4500 nits
Pixel Density	43264 dots/sqm
Input Voltage	AC100-240V/50-60Hz
Average Power Consumption	260 W/m ² (130W per side)
Max Power Consumption	780 W/m ² (390W per side)
Operating Temperature	-20°C to +60°C
Operating Humidity	10% to 90% RH
Life Span	100,000 Hours
Front Ingress Protection Class	IP65
Back Ingress Protection Class	IP54
Frame Materials	Aluminum Frame
Mounting	Universal Display Feet, (Optional) BG3036 Tripod
Connections	HDMI, AC Power



Request more information online at: www.finishlynx.com/product/displays/lynx-portable-display/