



ResultTV-VDM

Quick Start Guide

Introduction

This guide explains how to install and configure ResultTV-VDM to get started displaying data. Before you begin, you will need the following items:


- Lynx Startup Flash Drive *or* access to the Lynx website (www.finishlynx.com)
- ResultTV-VDM license number – available by contacting Lynx
- USB hardware dongle (green) – also available by contacting Lynx
- A computer with USB and Ethernet ports running Microsoft Windows

Install ResultTV-VDM

You can install the ResultTV-VDM software *either* from the Lynx startup flash drive *or* download it from the Lynx website: www.finishlynx.com/product/software/resulttv-display-software

1. Double-click the ResultTV-VDM installer and begin installation.
2. Follow the instructions on the screen to continue installation.
3. Enter your ResultTV-VDM license number when prompted.
4. Click Install.
5. When the **Security Key Installation** dialog appears, click to select **KEYLOK 2 (USB w/Driver)** and **Standalone**.
 - a. DO NOT connect the USB Dongle to the computer yet.
6. Click **Begin Install** and wait until the Security Key Installation is complete.

NOTE: The hardware dongle must be attached to the ResultTV computer at all times or the ResultTV software is disabled.

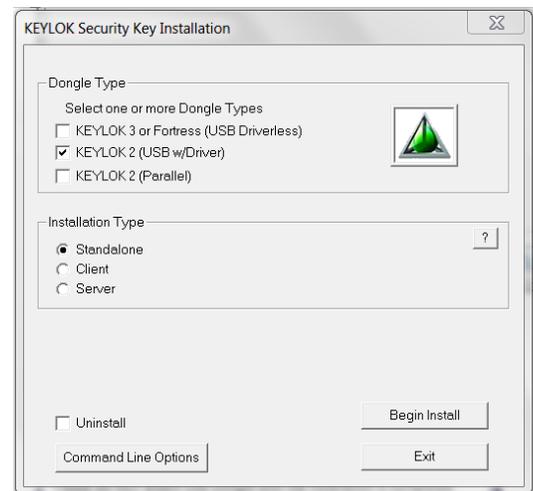

Configure ResultTV-VDM to Receive Data

1. Start ResultTV-VDM by double-clicking the ResultTV-VDM shortcut.
2. ResultTV-VDM is pre-configured to receive video display data on port 1024.

NOTE: For the *Lynx 360 Display*, go to **File | Options... | General** and select the *Video-360 (single/double)* profile. Then restart ResultTV-VDM.

Configure FinishLynx to Send Data

1. Run FinishLynx.
2. Click **Scoreboard | Options...** from the Menu bar. The **Options** dialog appears.
3. Click the **New** button to create a new scoreboard source.
4. From **Script:** drop-down list, select **ResultTV_Video_1line.lss**
5. Select **Network (connect)** from the **Serial Port:** drop-down list.
6. Enter the same **Port** number (1024).
7. In the **IP Address** field type the IP Address of the ResultTV-VDM computer.
8. Set **Running Time = Normal**.
9. Set **Results = Auto** and **Size = 1**, and then click **Ok**.
10. Close and restart FinishLynx.
11. Click **File | Open...** from the Menu bar and double-click **Boys3000.evn**.
12. The results now appear on the ResultTV-VDM display window.