



ResultV

Quick Start Guide

Introduction

This guide explains how to install and configure ResultV™ to get started displaying data. Before you begin, you will need the following items:


- Lynx Startup Flash Drive *or* access to the Lynx website (www.finishlynx.com)
- ResultV license number – available by contacting Lynx
- USB hardware dongle (green) – also available by contacting Lynx
- A computer with USB and Ethernet ports running Microsoft Windows

Install ResultV

You can install the ResultV software *either* from the Lynx startup flash drive *or* download it from the Lynx website: www.finishlynx.com/product/software/resultv-display-software

1. Double-click the ResultV installer and begin installation.
2. Follow the instructions on the screen to continue installation.
3. Enter your ResultV license number when prompted.
4. Click Install.
5. When the **Security Key Installation** dialog appears, click to select **KEYLOK 2 (USB w/Driver)** and **Standalone**.
 - a. DO NOT connect the USB Dongle to the computer yet.
6. Click **Begin Install** and wait until the Security Key Installation is complete.

NOTE: The hardware dongle must be attached to the ResultV computer at all times or the ResultV software is disabled.

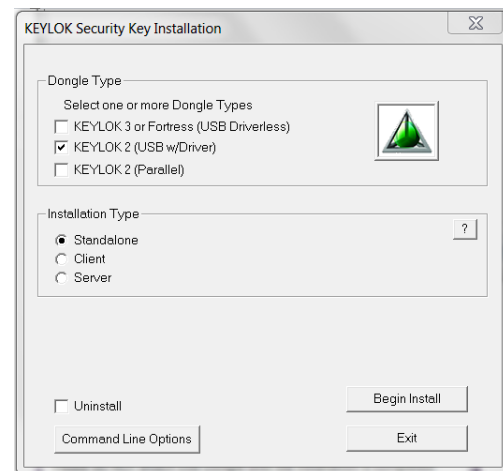

Configure ResultV to Receive Data

1. Start ResultV by double-clicking the ResultV shortcut.
2. Click **File | Options...** from the Menu bar. The **Options** dialog appears.
3. Go to the **Sources** tab.
4. From the **Script:** drop-down list, select Video Display.rss.
5. From the **Serial Port:** drop-down list, select **Network (listen)**.
6. Enter Port **1024**.
7. Click **Ok**.
8. Click **File | Open...** from the Menu bar and double-click **Video Display.rtv**.

Configure FinishLynx to Send Data

1. Run FinishLynx.
2. Click **Scoreboard | Options...** from the Menu bar. The **Options** dialog appears.
3. Click **New** to create a new scoreboard source.
4. From **Script:** drop-down list, select **ResultV_Video_1line.lss**
5. Select **Network (connect)** from the **Serial Port:** drop-down list.
6. Type the same **Port** number (1024) you assigned to the ResultV Source.
7. In the **IP Address** field type the IP Address of the ResultV computer.
8. Set **Running Time** = **Normal**.
9. Set **Results** = **Auto** and **Size** = **1**, and then click **Ok**.
10. Close and restart FinishLynx.
11. Click **File | Open...** from the Menu bar and double-click **Boys3000.evn**.
12. The results now appear on the ResultV display window.